A	1. ADD 820 ohm 1/4W 5% RESISTOR (R102) FROM J101–40 TO J101–49 ON THE COMPONENT SIDE. USE INSULATING SLEEVING ON BOTH LEGS OF RESISTOR. 2. MARK PCB WITH NEW ASSEMBLY REV. LEVEL.	R102	1324

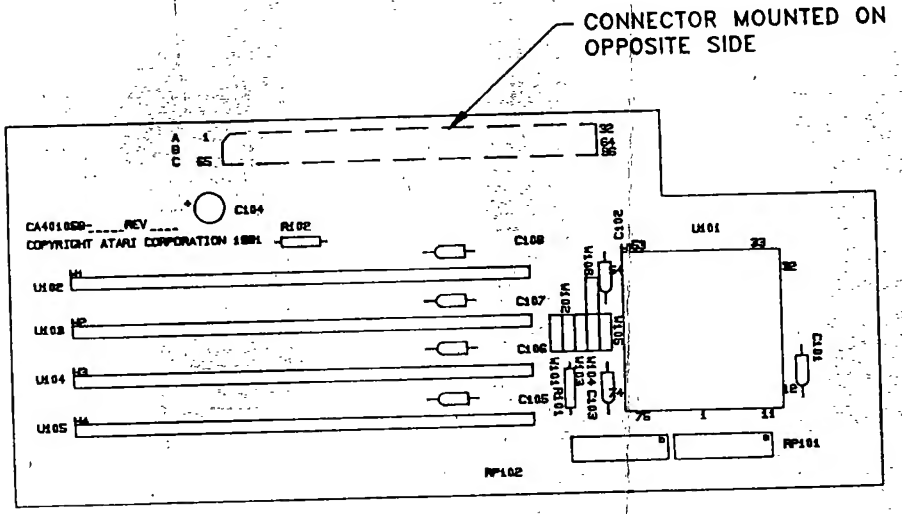

TT RAM JUMPER TABLE			
TYPE SIMMS 1MEG X 8 4MEG X 8	W101 2 – 3 1 – 2	W102 2 – 3 1 – 2	W106 2 – 3 1 – 2
STARTING RAM ADDRESS $0100 0000	W103 2 – 3	W104 2 – 3	
ADDRESS MODE NON–BURST BURST	W105 1 – 2 2 – 3 (DEFAULT)		

		UNLESS OTHERWISE SPECIFIED TOLERANCES ON LINEAR DIMENSIONS / ON ANGULAR DIMENSIONS XX ± .01	DRAWN BY: MJB DATE: 3/25/91 CHECKED: GS DATE: 3/25/91